



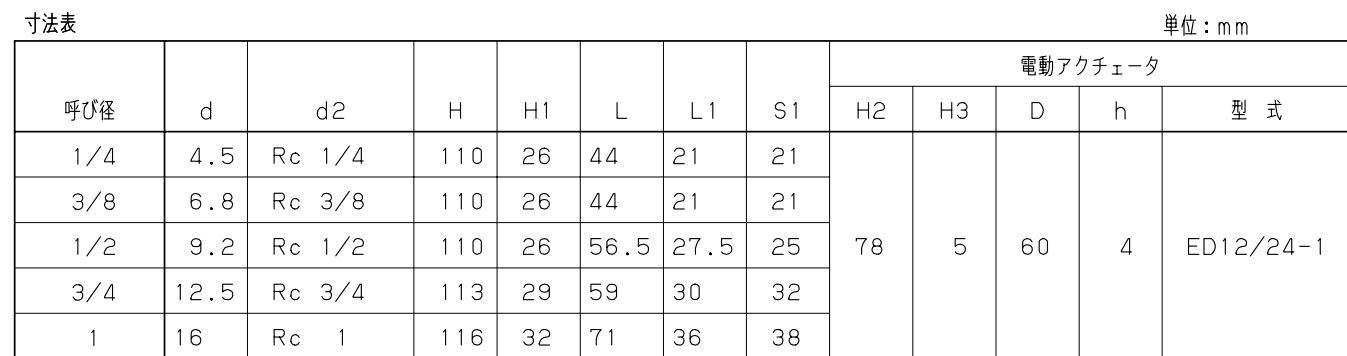




KITZ

株式会社 **キッツ**

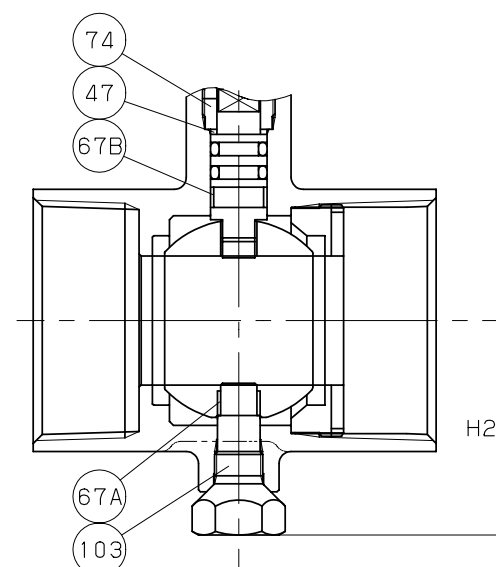

SIZE 1.1/2 ONLY

SIZE 2 ONLY

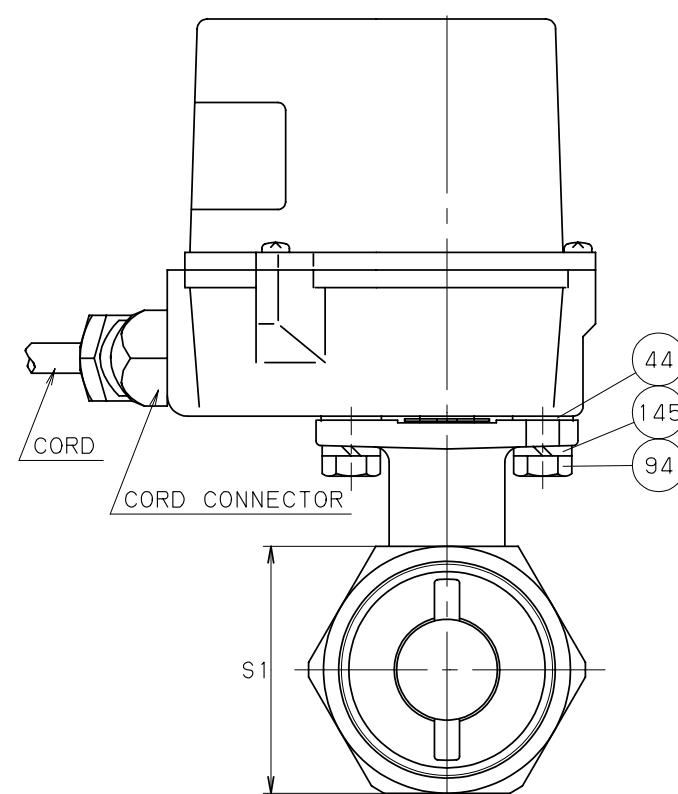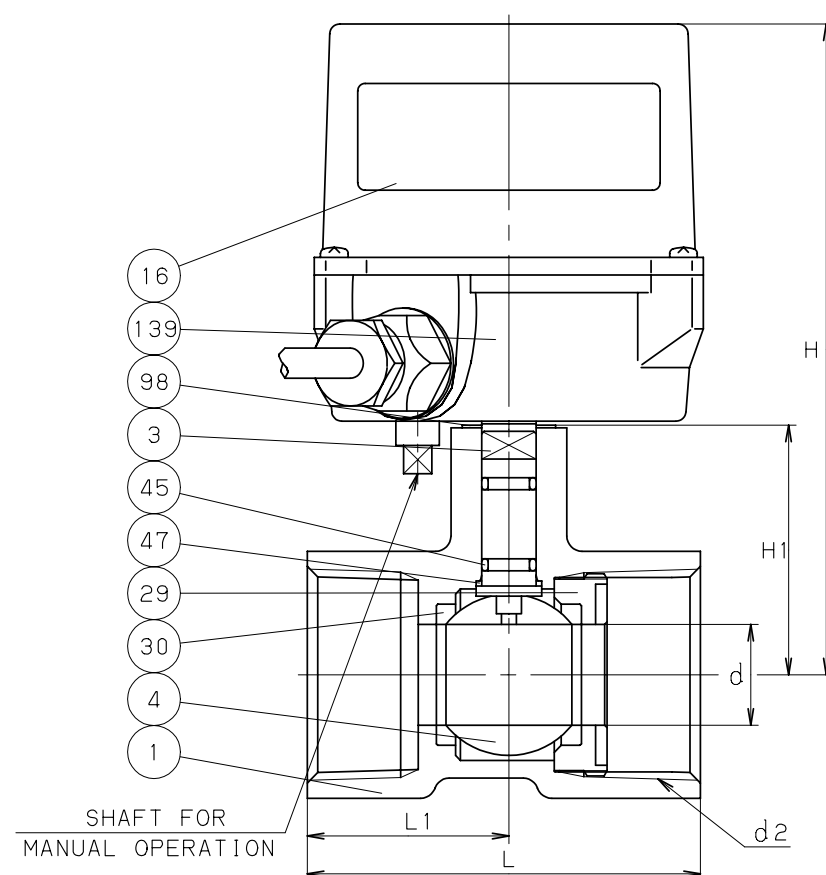

ONE SIDE THE OTHER SIDE
MARKING ON THE BODY

DIMENSIONS

DIMENSIONS									KITZ-ELECTRIC ACTUATOR					
NOMINAL SIZE	d	d2	H	H1	H2	L	L1	S1	E1	E2	W1	W2	b	TYPE
1.1/4	20	Rc 1.1/4	128.5	49.5	—	78	40	49	39	39	52	30	5.5	ED12/24-2
1.1/2	24.5	Rc 1.1/2	131.5	52.5	—	83	42.5	53						
2	32	Rc 2	137.5	58.5	53.5	100	51	65						

UNIT : mm

NOTE	(1) VALVE SIZE IDENTIFICATION.
	(2) Cr PLATING
	(3) Zn PLATING

KITZ

NO	NAME OF PARTS	QTY	MATERIALS	SPECIFICATIONS
				JIS SPEC.
1	BODY	1	STAINLESS STEEL	SCS14A
3	STEM	1	STAINLESS STEEL	SUS316 (2)
4	BALL	1	STAINLESS STEEL	SUS316
16	NAME PLATE	1		
29	INSERT	1	STAINLESS STEEL	SCS14A
30	BALL SEAT	2	PTFE	
44	INSULATOR	2	G/F EPOXY	
45	O RING	2	FKM	
47	THRUST WASHER	1	REINFORCED PTFE	
67A	STEM BEARING	1	G/F PTFE	
67B	STEM BEARING	1	G/F PTFE	
74	BUSH	1	BRASS	C3771BE
92	CONNECTOR	1	CARBON STEEL	S45C (3)
94	BOLT	2	STAINLESS STEEL	SUS304
98	INDICATOR PLATE	1	STAINLESS STEEL	SUS304
103	BOTTOM STEM	1	STAINLESS STEEL	SUS316 (2)
139	ELECTRIC ACTUATOR	1		
145	SPRING WASHER	2	STAINLESS STEEL	SUS304

STANDARD	FACE TO FACE OR END TO END	KITZ STANDARD
	END CONNECTION	JIS B0203
	WALL THICKNESS	KITZ STANDARD
	PRESSURE TEST	KITZ STANDARD
FIGURE		ED12/24-UTE

10K CAST STAINLESS STEEL BALL VALVES

WITH KITZ-ELECTRIC ACTUATOR "KELMO"

REDUCED BORE, SCREWED END.

DATE APPD	JAN.05.'09	DRAWING NO	△		
APPD BY	M. TAKUSAGAWA		△		
CHKD BY	H. KARASAWA	965-F30051	△		
DSGND BY	Y. YOKOCHI		△		
DRAWD BY	K. AMEMIYA	REV-06	MARK	DATE	BY

KITZ CORPORATION