


エスロン ユニオン継手

●コンパクトタイプ (TSソケット、PVDF変換継手)


- より小さく、コンパクトになりました。省スペース配管ができます。
- 呼び径は13~100までの10サイズに拡大。
- 実績のある台形ねじで、手締めで高い止水性を発揮し、しっかりとグリップします。

注:ユニオンの部品は、コンパクトタイプとボールバルブ互換タイプでは互換性はありません。


●TSソケット

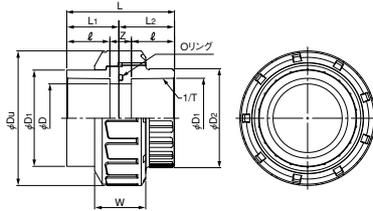

●ねじ変換継手



●PVDF変換継手




■寸法表

材質: PVC・HT(C-PVC)

単位:mm

呼び径		TS受口					ねじ受口				融着受口					L ₂	d	Du	D ₁	D ₂	W	Oリング		
A	B	d ₁	I/T	Z	ℓ	L ₁	L	Rc	Z	ℓ ₂	L	D ₁	t	Z	ℓ ₁	L ₁	L							
13	3/8	18.3	1/30	6	18	20	42±1.5	3/8	9	15	42±1.5	—	—	—	—	—	—	22	13	40	24	26	17	P-16
16	1/2	22.3	1/37	8	22	25	52±1.5	1/2	15	15	52±1.5	20	1.9	8	31	50	77±1.5	27	15	46	30	32	20	P-20
20	3/4	26.3	1/42	9	25	28	59±1.5	3/4	18	16	59±1.5	25	1.9	9	31	50	81±1.5	31	20	54	35	37	23	P-24
25	1	32.33	1/44	9	29	32	67±1.5	1	13	25	67±1.5	32	2.4	9	26	50	85±1.5	35	25	67	43	45	28	P-30
30	1 1/4	38.43	1/37	12	32	36	76±1.5	1 1/4	11	33	76±1.5	40	2.4	12	22	50	90±1.5	40	31	78	53	55	31	P-36
40	1 1/2	48.46	1/38	12	35	39	82±1.5	1 1/2	18.5	28.5	82±1.5	50	3.0	12	22	50	93±1.5	43	40	87	61	63	42	P-46
50	2	60.56	1/34	16	38	43	92±1.5	2	21	33	92±1.5	63	3.0	16	22	50	99±1.5	49	51	107	76	78	43	P-58
65	2 1/2	76.6	1/38	18	45	52	108±1.5	2 1/2	31	32	108±1.5	—	—	—	—	—	—	56	65	128	90	93	50	P-71
75	3	89.6	1/40	24	48	58	120±1.5	3	35	37	120±1.5	—	—	—	—	—	—	62	77	151	108	111	57	P-85
100	4	114.7	1/42	36	58	72	152±1.5	4	49	45	152±1.5	—	—	—	—	—	—	80	100	185	132	136	72	P-112

●ボールバルブ互換タイプ




■寸法表

材質: PVC・HT(C-PVC)

単位:mm

呼び径		TS受口			L	L ₁	L ₂	Z	d	Du	D ₁	D ₂	W	Oリング
A	B	d ₁	I/T	ℓ										
16	1/2	22.3	1/37	22	59±1.5	29	30	13	16	49	33	31	24	P-20
20	3/4	26.3	1/42	25	68±1.5	35	33	16	20	59	35	36	26	P-24
25	1	32.3	1/43	29	78±1.5	36	42	20	25	67	44	44	31	P-30
30	1 1/4	38.4	1/37	32	90±1.5	44.5	45.5	26	30	81	54	54	31	P-36
40	1 1/2	48.5	1/38	35	94±1.5	42	52	24	40	98	65	67	40	P-48A
50	2	60.6	1/34	38	110±1.5	48	61	34	50	120	77	79	43	P-58

エスロン サドルバンド



■寸法表

単位:mm

呼び径	φD ₁	φD ₂	t	C	L	φe	T	H ₁	H	B	使用ボルト
16	22	24	3	42	53	6	5	11	26	15	M5
20	26	29	3	48	59	6	5	13	30.5	18	M5
25	32	35	3	54	65	6	6	16	36.5	18	M5
28	34	37	3	59	73	7	7	17	38.5	20	M6
30	38	41	4	66	80	7	7	19	43.5	20	M6
40	48	52	4	90	109	10	9	24	54	25	M8
50	60	64	4	97	116	10	9	30	66	28	M8
65	76	81	4	114	134	10	10	38	82.5	30	M8
75	89	94	4	134	158	12	11	44.5	95.5	38	M10
100	114	120	4.5	160	186	12	12	57	121.5	42	M10
125	140	150	5	192	218	12	12	70	150	46	M10
150	165	177	8	238	268	17	14	82.5	179	50	M14
200	216	236	10	316	356	18	20	108	236	70	M16