



密閉丸形(1,000～50,000ℓ)寸法図及び規格表

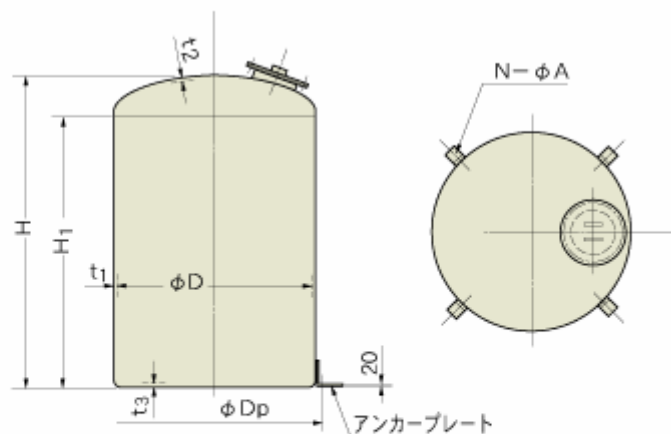

| 容量<br>(ℓ) | タンク主寸法(mm) |                |       |                 |                |                |                |      | 本体<br>重量<br>(kg) |
|-----------|------------|----------------|-------|-----------------|----------------|----------------|----------------|------|------------------|
|           | φD         | H <sub>1</sub> | H     | φD <sub>p</sub> | t <sub>1</sub> | t <sub>2</sub> | t <sub>3</sub> | N-φA |                  |
| 1,000     | 1,000      | 1,375          | 1,595 | 1,110           | 4.8            | 4.8            | 4.8            | 4-13 | 73               |
| 2,000     | 1,200      | 1,875          | 2,120 | 1,310           | 4.8            | 4.8            | 4.8            | 4-15 | 111              |
| 3,000     | 1,600      | 1,600          | 1,935 | 1,710           | 4.8            | 4.8            | 4.8            | 4-15 | 146              |
| 4,000     | 1,600      | 2,100          | 2,435 | 1,710           | 4.8            | 4.8            | 4.8            | 4-15 | 172              |
| 5,000     | 1,800      | 2,070          | 2,440 | 1,910           | 4.8            | 4.8            | 4.8            | 4-15 | 197              |
| 6,000     | 2,000      | 2,010          | 2,420 | 2,110           | 4.8            | 4.8            | 4.8            | 4-15 | 224              |
| 8,000     | 2,000      | 2,650          | 3,060 | 2,110           | 5.1            | 4.8            | 4.8            | 4-15 | 280              |
| 10,000    | 2,200      | 2,730          | 3,210 | 2,320           | 5.1~<br>5.6    | 4.8            | 5.4            | 4-15 | 327              |
| 15,000    | 2,400      | 3,420          | 3,900 | 2,530           | 5.1~<br>5.6    | 4.8            | 5.4            | 4-19 | 427              |
| 20,000    | 2,600      | 3,870          | 4,400 | 2,730           | 5.1~<br>6.3    | 4.8            | 7              | 4-19 | 559              |
| 25,000    | 2,800      | 4,170          | 4,730 | 2,930           | 5.1~<br>7.5    | 5.4            | 7.9            | 4-23 | 686              |
| 30,000    | 2,800      | 5,000          | 5,560 | 2,930           | 5.1~<br>7.5    | 5.4            | 7.9            | 4-23 | 798              |
| 40,000    | 3,200      | 5,100          | 5,740 | 3,340           | 5.6~<br>8.7    | 6.3            | 8.6            | 6-23 | 1095             |
| 50,000    | 3,400      | 5,650          | 6,320 | 3,550           | 5.6~<br>9.2    | 6.3            | 9.5            | 6-23 | 1,351            |


密閉丸形(60,000～130,000ℓ)寸法図及び規格表

※全タンク天板フラット可(補強材必要)

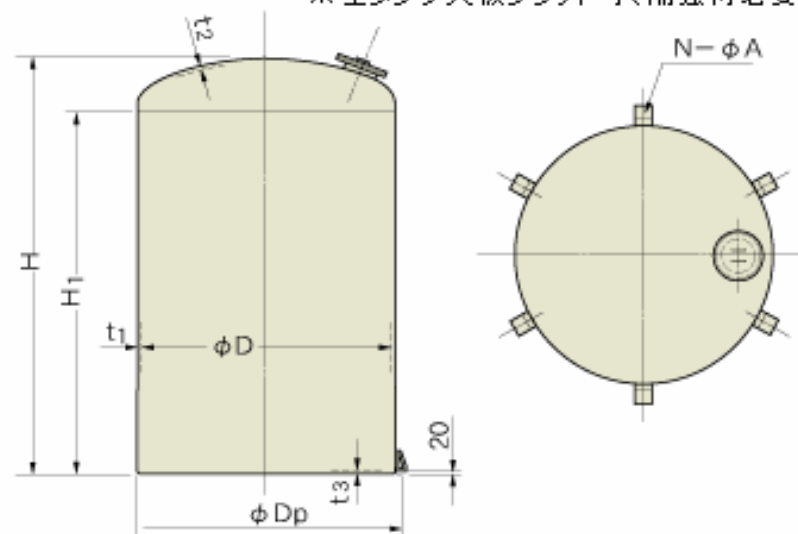


| 容量<br>(ℓ) | タンク主寸法(mm) |                |        |                 |                |                |                |       | 本体<br>重量<br>(kg) |
|-----------|------------|----------------|--------|-----------------|----------------|----------------|----------------|-------|------------------|
|           | φD         | H <sub>1</sub> | H      | φD <sub>p</sub> | t <sub>1</sub> | t <sub>2</sub> | t <sub>3</sub> | N-φA  |                  |
| 60,000    | 3,800      | 5,400          | 6,160  | 3,950           | 5.6~<br>9.9    | 6.3            | 10.2           | 6-27  | 1,574            |
| 70,000    | 3,800      | 6,300          | 7,060  | 3,950           | 5.6~<br>10.4   | 6.3            | 11.1           | 6-27  | 1,774            |
| 80,000    | 3,800      | 7,150          | 7,910  | 3,950           | 5.6~<br>11.6   | 6.3            | 11.1           | 8-27  | 1,994            |
| 100,000   | 3,800      | 9,000          | 9,760  | 3,970           | 5.6~<br>14.7   | 6.3            | 14.3           | 12-27 | 2,749            |
| 130,000   | 3,800      | 11,500         | 12,260 | 3,990           | 5.6~<br>19.5   | 6.3            | 19.3           | 24-27 | 3,863            |

# ノズル(標準JIS10<sup>k</sup>相当)

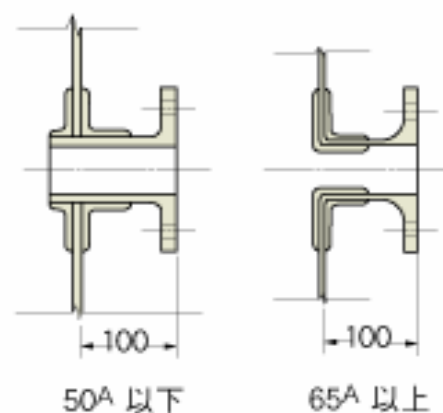


| 呼径 | 15 <sup>A</sup> | 20 <sup>A</sup>  | 25 <sup>A</sup>  | 40 <sup>A</sup>  | 50 <sup>A</sup>  | 65 <sup>A</sup>  |
|----|-----------------|------------------|------------------|------------------|------------------|------------------|
| 呼径 | 80 <sup>A</sup> | 100 <sup>A</sup> | 150 <sup>A</sup> | 200 <sup>A</sup> | 250 <sup>A</sup> | 300 <sup>A</sup> |

# マンホール(天板)

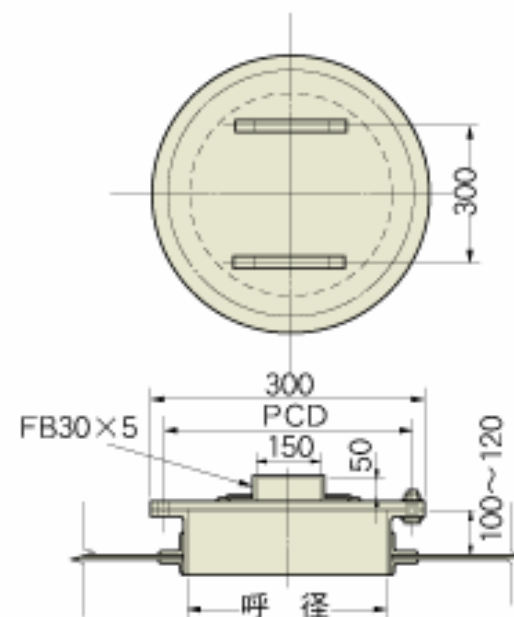

| 呼 径  | P.C.D <sup>mm</sup> | O.D | B.N              |    |
|------|---------------------|-----|------------------|----|
| φ450 | 555                 | 605 | 16-φ19<br>16-M16 | 標準 |
| φ500 | 605                 | 655 | 20-φ19<br>20-M16 | 特注 |
| φ600 | 705                 | 755 | 20-φ19<br>20-M16 | 特注 |

## レベルゲージ

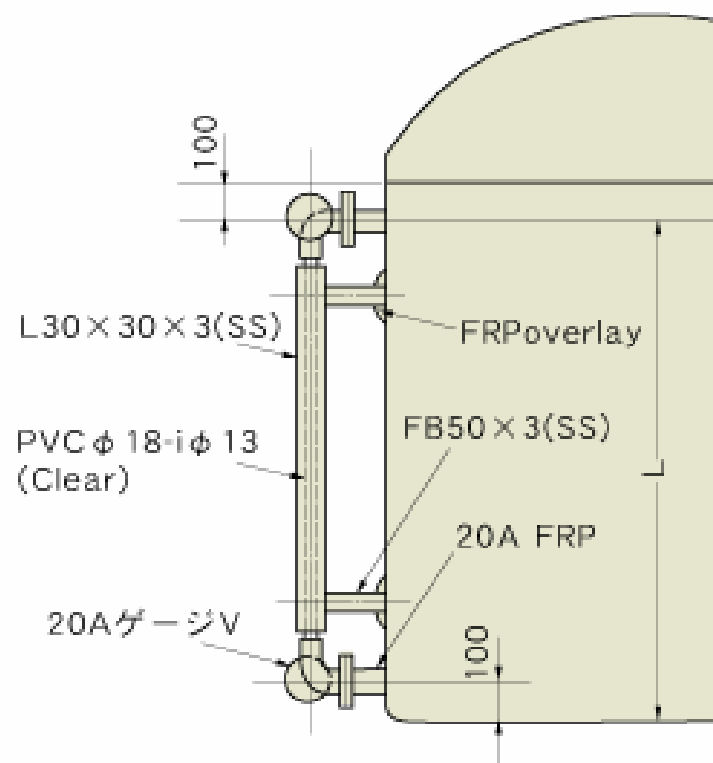

注

1,000～25,000ℓ

1段

30,000～80,000ℓ

2段

100,000ℓ

3段

※2段以上のレベルゲージのラップは200mmとする。

※フロートゲージ式もあります。


| 容量(ℓ)   | L     |
|---------|-------|
| 1,000   | 1,275 |
| 2,000   | 1,770 |
| 3,000   | 1,500 |
| 4,000   | 2,000 |
| 5,000   | 1,970 |
| 6,000   | 1,910 |
| 8,000   | 2,550 |
| 10,000  | 2,630 |
| 15,000  | 3,320 |
| 20,000  | 3,770 |
| 25,000  | 4,070 |
| 30,000  | 4,900 |
| 40,000  | 5,000 |
| 50,000  | 5,550 |
| 60,000  | 5,300 |
| 70,000  | 6,200 |
| 80,000  | 7,200 |
| 100,000 | 9,000 |



# 円筒横型密閉



液体やご使用条件に合わせて、樹脂を選定し設計製作することができます。

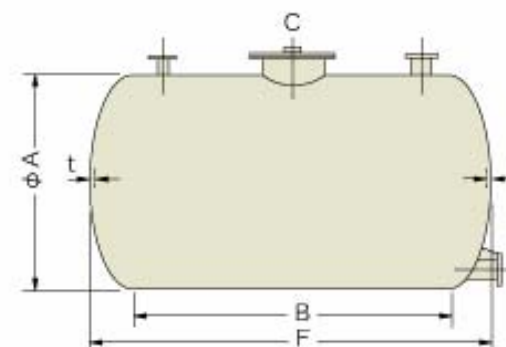

| 容量(ℓ)  | 横型 No. | φA    | B     | F     | t    | 重量(kg) | 備考               |
|--------|--------|-------|-------|-------|------|--------|------------------|
| 1,000  | Y1     | 1,000 | 1,080 | 1,500 | 6.4  | 68     | マンホール1ヶ<br>ノズル1ヶ |
| 2,000  | Y2     | 1,200 | 1,500 | 2,000 | 6.4  | 105    |                  |
| 3,000  | Y3     | 1,500 | 1,380 | 2,000 | 6.4  | 134    |                  |
| 4,000  | Y4     | 1,500 | 1,980 | 2,600 | 6.4  | 165    |                  |
| 5,000  | Y5     | 1,600 | 2,140 | 2,800 | 6.4  | 187    |                  |
| 6,000  | Y6     | 1,800 | 2,060 | 2,800 | 8    | 270    |                  |
| 10,000 | Y10    | 2,200 | 2,100 | 3,000 | 9.5  | 429    |                  |
| 15,000 | Y15    | 2,400 | 2,820 | 3,800 | 9.5  | 571    |                  |
| 20,000 | Y20    | 2,400 | 4,020 | 5,000 | 11.2 | 853    |                  |
| 33,000 | Y30    | 2,800 | 4,280 | 5,400 | 11.2 | 1,083  |                  |
| 40,000 | Y40    | 3,000 | 5,000 | 6,200 | 12.7 | 1,497  |                  |
| 50,000 | Y50    | 3,400 | 4,840 | 6,200 | 17.5 | 2,417  |                  |

(備考) ※フランジはJIS 10kg/cm<sup>2</sup> 脚座4カ所 ※使用圧力 常圧(大気圧)