


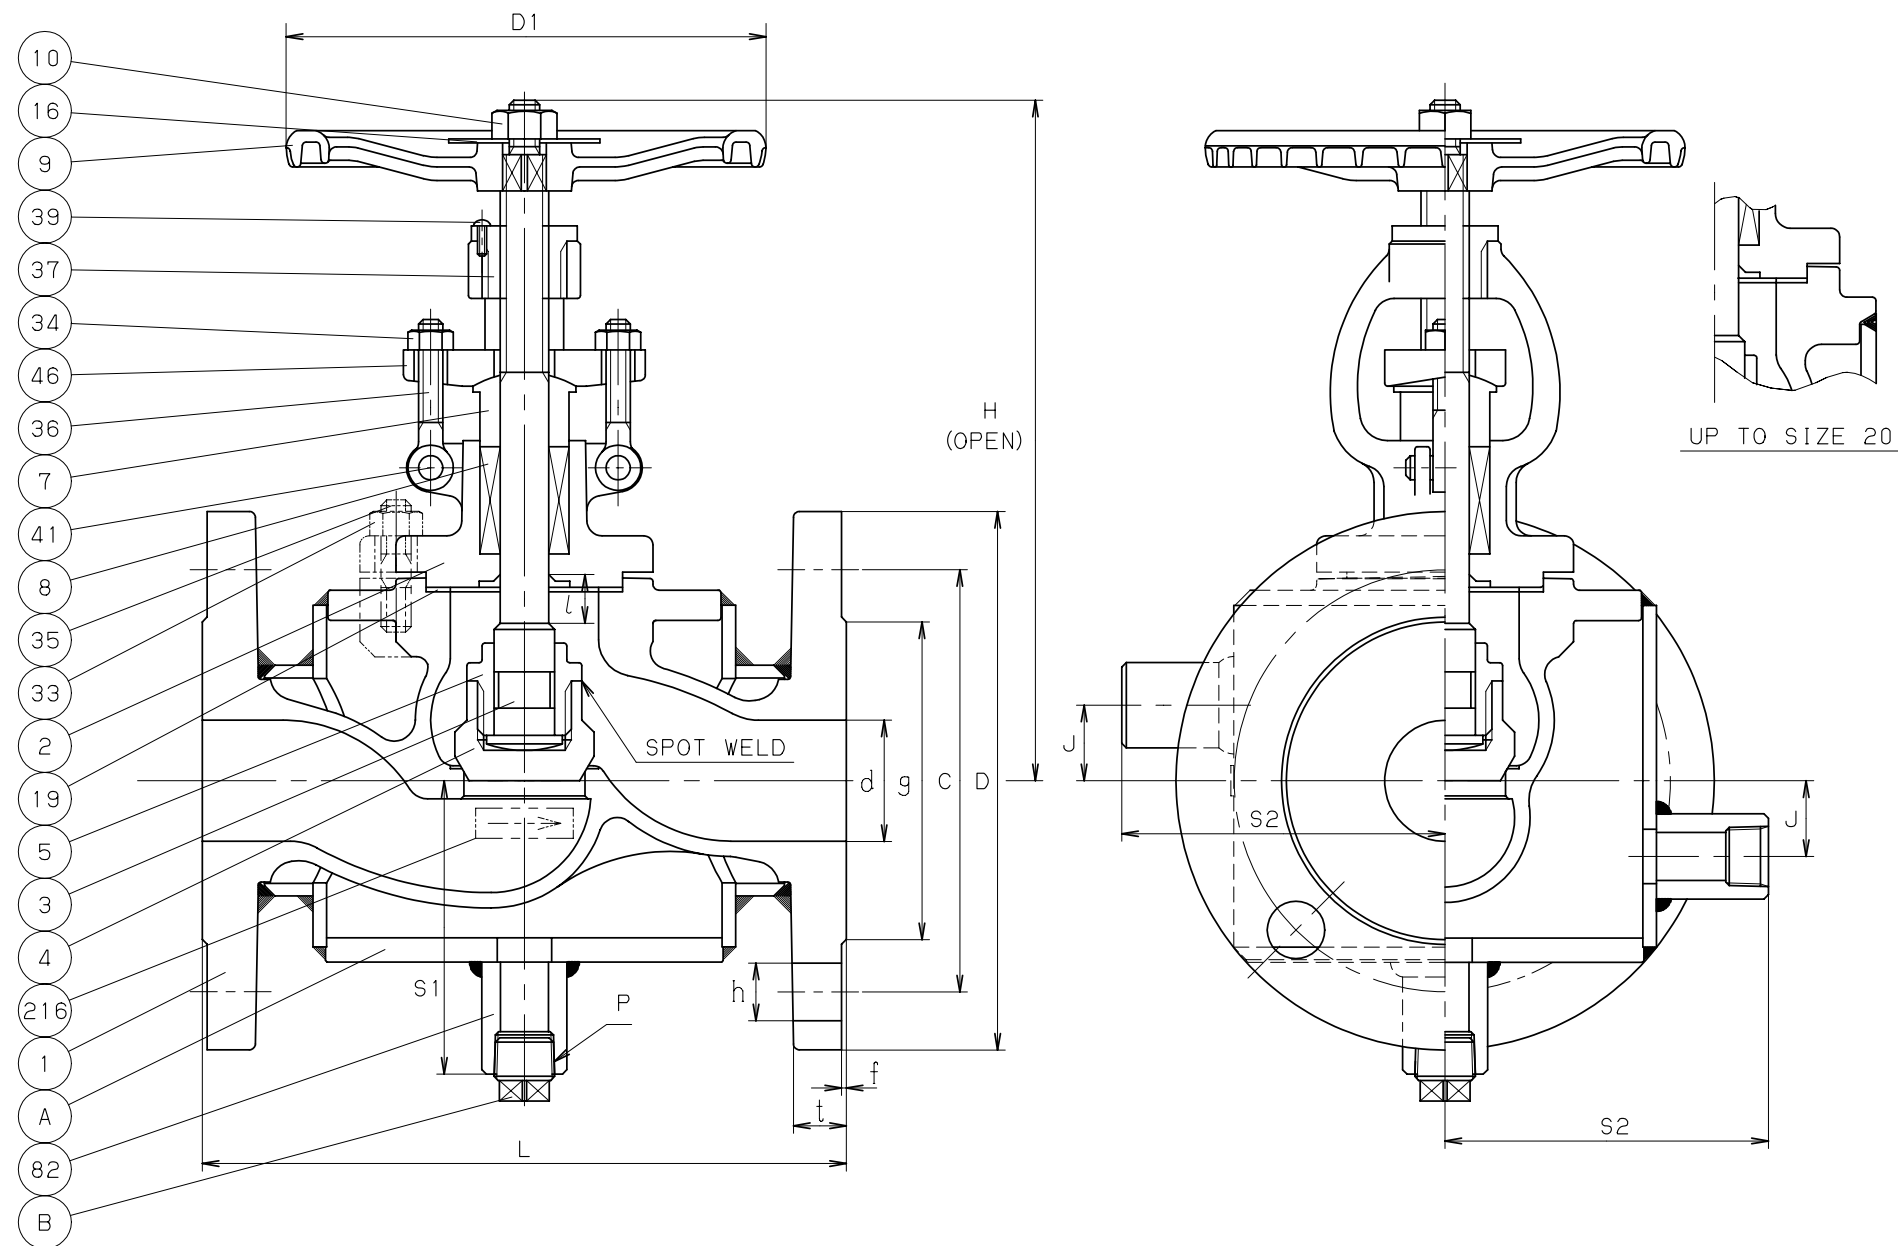

DIMENSIONS.

NOMINAL SIZE		d	H	D1	L	l	END FLANGE									S1	S2	SOCKET		J
							FLANGE SIZE	D	BOLT HOLE		BOLT SIZE	g	t	f	P			NO.		
C	NO.								h											
15	1/2	15	186	100	156	9	40	140	105	4	19	M16	81	16	2	75	80	Rc1/2	3	10
20	3/4	20	186	100	156	10	40	140	105	4	19	M16	81	16	2	75	80	Rc1/2	3	10
25	1	25	187	100	190	12	50	155	120	4	19	M16	96	16	2	85	86	Rc1/2	3	15
40	1.1/2	40	236	160	214	16	65	175	140	4	19	M16	116	18	2	95	105	Rc1/2	3	25

NOTE (1) FLEXIBLE GRAPHITE + PTFE BRAIDED PACKING.

UNIT ; mm

NO	NAME OF PARTS	QTY	MATERIALS	SPECIFICATIONS
				JIS SPEC.
1	BODY	1	STAINLESS STEEL	SCS14A
2	BONNET	1	STAINLESS STEEL	SCS14A
3	STEM	1	STAINLESS STEEL	SUS316
4	DISC	1	STAINLESS STEEL	SUS316
5	LOCK NUT	1	STAINLESS STEEL	SUS316
7	GLAND	1	STAINLESS STEEL	SUS316
8	GLAND PACKING	1S	(1)	
9	HAND WHEEL	1	DUCTILE IRON	FCD400
10	WHEEL NUT	1	CARBON STEEL	SS400
16	NAME PLATE	1	ALUMINUM	A1050P
19	GASKET	1	NON-ASBESTOS SHEET	
33	BONNET NUT	4	STAINLESS STEEL	SUS304 (8)
34	GLAND NUT	2	STAINLESS STEEL	SUS304 (8)
35	BONNET BOLT	4	STAINLESS STEEL	SUS304 (B8)
36	GLAND BOLT	2	STAINLESS STEEL	SUS304 (B8)
37	YOKE BUSH	1	DUCTILE NI-RESIST	
39	SET SCREW	1	CARBON STEEL	
41	GLAND BOLT PIN	2	STAINLESS STEEL	SUS403
46	GLAND FLANGE	1	STAINLESS STEEL	SCS13A
82	SOCKET	1S	CARBON STEEL	S25C
216	FLOW DIRECTION	1	STAINLESS STEEL	SUS304
	PLATE			

A	JACKET	1 S	CARBON STEEL	STPG370+SS400
B	PLUG	1	CARBON STEEL	S25C

1 S=1 SET

STANDARD	FACE TO FACE OR END TO END	KITZ STANDARD
	END CONNECTION	JIS B2220 10K
	WALL THICKNESS	ASME B16.34 CLASS 150
	PRESSURE TEST	KITZ STANDARD
FIGURE		10UPAJM


10K CAST STAINLESS STEEL

GLOBE VALVES

BOLTED BONNET, OUTSIDE SCREW & YOKE, JACKET TYPE, FLANGED ENDS.

DATE APPD	JAN.05.'09	DRAWING NO	△		
APPD BY	S. SANADA	962-A20009	△		
CHKD BY	Y. KONO		△		
DSGND BY	H. NISHIDATE		△		
DRAWN BY	M. HORIGOME		△		
		REV-06	MARK	DATE	BY

KITZ CORPORATION

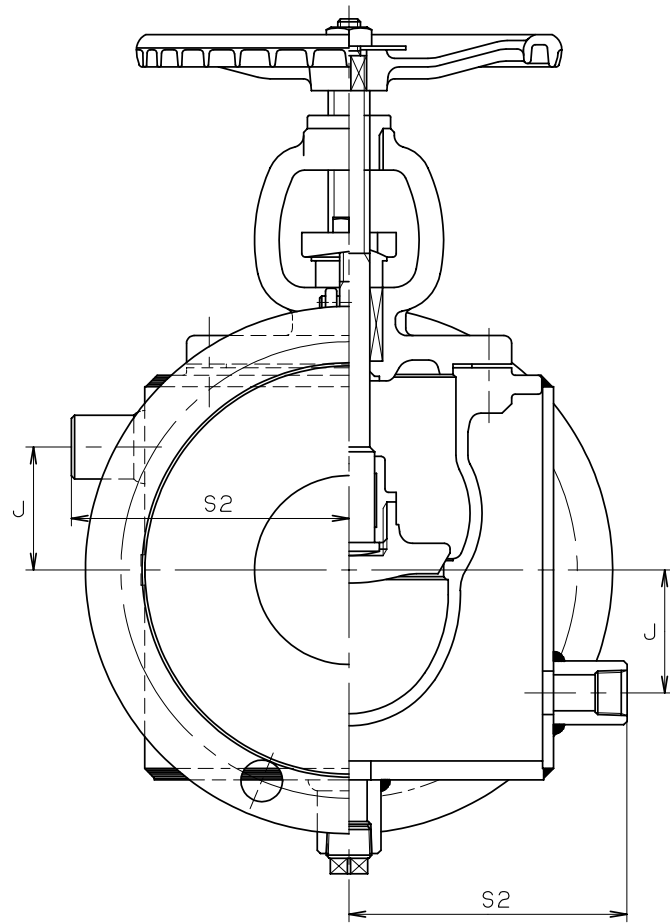

UNIT: mm

NOMINAL SIZE		d	H	D1	L	l	END FLANGE								S1	S2	SOCKET		J	
							FLANGE	D	BOLT HOLE		BOLT	g	t	f			P	NO.		
mm	in								SIZE	C										NO.
50	2	50	237	160	239	23	80	185	150	8	19	M16	126	18	2	103	105	Rc1/2	3	30
80	3	80	293	200	280	33	100	210	175	8	19	M16	151	18	2	120	127	Rc1/2	3	50
100	4	100	326	225	349	39	150	280	240	8	23	M20	212	22	2	151	148	Rc3/4	3	65

NOTE (1) FLEXIBLE GRAPHITE + PTFE BRAIDED PACKING.
(2) SIZE 50 ONLY;SUS316.

[illegible]